



HORIZONTAL AUTOCLAVE CYLINDRICAL

MODEL NO.- Acm-32064- A

HORIZONTAL AUTOCLAVE CYLINDRICAL

We are manufacturers of horizontal autoclave, triple walled horizontal autoclave India since 1990. Our horizontal autoclaves are widely used for day to day mass scale sterilization procedures and in various bulk laboratory applications, where dryness of the sterilized medium is of paramount importance, given the fact that semi dry sterilized media is prone to various micro-bacterial and viral infections. We specialize in both standard and customized models, specifically designed to meet the challenging demands of various scientists for individual and specialized research applications. Over a short period of time Weiber brand have been established as reliable exporters of horizontal autoclave in India, catering to the vast markets in South East Asia, Middle East, Africa and Europe. Apart from that we are supplying our autoclave in India , catering to a variety of customers ranging from Defence Installations, Research Laboratories, Educational Institutes and various R and D laboratories of leading national and multinational companies.

Salient Features:

- Steam Stock Provision
- Versatile usage
- Stainless steel construction
- Ergonomic Design
- Energy Efficient
- Double Safety Radial Locking Arrangement
- Double Safety Valve Protection
- Hydraulic Testing Upto 2.5 times the working pressure
- Calibration And Protocol Documentation



Construction

Our horizontal cylindrical autoclave are triple walled units. Outer body of our autoclave is constructed out of thick gauge stainless steel sheet of SS-304 grade. The inner chamber is also made of heavy gauge stainless steel sheet of SS-304 grade. The middle wall is also constructed from the strong and sturdy stainless steel sheet of ss-304 grade s stainless steel sheet. These are steam stocking models connected with a three way valve to control the sterilization cycle inside the autoclave. Our autoclaves are insulated by generous mineral glass ass wool insulation . The strong lid constructed out of thick stainless steel plate has a double safety radial locking arrangement , which ensures an easy and smooth opening and closing operation for all our autoclaves. The steam generator of the autoclave is also constructed from stainless steel sheet of grade ss-304. Our horizontal autoclaves are ideally suited for hospitals and research labs where safety is the first priority of the users, since it is equipped with a double safety steam release valve. At the same time we test all our autoclaves for up to 2.5 times the standard working pressure to ensure maximum safety and protection from any unfortunate incident. All our horizontal autoclaves are supplied complete with pressure gauge, pressure release valve automatic pressure control switch, vacuum breaker and steam trap as a standard feature. The unit is mounted on a tube stand constructed of high grade steel, which is duly pre treated with primers for rust proofing and painted with stove enamel.

Heating

The heating process in our triple walled vertical autoclave is done through specially designed water heaters of suitable wattage to ensure optimum sterilization time in every sterilization cycle.

Working Temperature / Pressure

As per the international standards and guidelines our triple walled vertical autoclave have a working temperature of 121oc. ,however for specific requirements our autoclaves can be upgraded to be used for up to 134° c.

Working Pressure

Working pressure for our standard dry sterilization model vertical autoclave is 15 psi, however this can be upgraded to be used for higher pressures of up to 30 psi..

Pressure Range

The normal pressure range of our autoclave is 5 psi to 20 psi

Pressure Control

The pressure inside our vertical autoclave is controlled through a semi automatic electro mechanical device called piezostat, which controls the pressure inside the chamber and cuts of the current from the heater whenever the pressure exceeds the set pressure value of the autoclave, thus making it very safe and energy efficient.



Technical Features

- Hi-tech radial lock locking mechanism for ultimate ease of operation and safety.
- Steam Release valve of Stainless Steel ensuring a long life of the equipment.
- Huger grade spring loaded safety valve of brass, duly chrome plated.
- Water Indication Gauge with stainless steel enclosure
- High accuracy and reliable pressure gauge.
- Multiple operating valve for the control of the sterilization cycle.
- Accidental Vacuum Break Device: Ensuring vacuum break due to power failure or any other usage
- Water Level Cut Off Device
- CUT Hammer contractor for long trouble free usage
- Specially designed ISI marked stainless steel heaters
- Plug screen to prevent line choking due to sediment discharge
- Highly accurate temperature and pressure gauges for boiler chamber and jacket

Standard Models (Inner Dimensions)

- (Dia) x (Depth)
- 400mm x 600mm
- 500mm x 900mm
- 550mm x 750mm
- 400mm x 1100mm
- 500mm x 1200mm
- 600mm x 1200mm
- 750mm x 1200mm

Note

The above mentioned sizes are of our standard horizontal cylindrical autoclave. However we are fully capable to cater to the demand of any customized size for any special application.

Upgrades (Standard)

- **Low Water Protection Device:** This automatic system can be incorporated with our vertical autoclaves to give protection against the low water scenario under prolonged usages.
- **Timer With Alarm System:** This semi automatic device can be incorporated with the standard models of our vertical autoclave which helps the user to set the sterilization time of the system and do other tasks without bothering to monitor the sterilization cycle. This device cut off the current from the main system when the set value for a given sterilization cycle is attained and gives a loud audio alarm.
- **Digital Temperature Indicator:** A solid state digital temperature controller cum indicator can be incorporated with our basic vertical autoclave models for ease of monitoring the temperature of the autoclave from a distance through its large LED display, which is visible from quite a distance.
- **Programmable Temperature Controller:** A programmable micro processor based temperature controller cum indicator can be incorporated in our basic vertical autoclave models to pre program the sterilization cycle temperature with high amount of accuracy and reliability
- **Chart Recorder:** This a semi automatic self contained easy to use recording device, which permanently records the temperature is any given sterilization cycle of our vertical autoclave on a graph sheet., with the help of a bimetallic strip transducer chip incorporated in the unit
- **Technical Features:** Chart size:4" dia Accuracy:2% (FSD) Response time: 12 minutes

PLC control system

Our standard plc control system is based on the hi-tech state of the art micro-processor circuit technology, ensuring a complete automatic operations along with high efficiency and great reliability. This computerized logic control system ensures a 100% automatic operation throughout the sterilization cycle of our vertical autoclave. No intermediary human intervention is necessary after choosing the parameters and initiating the sterilization process in our autoclaves.. The primary cycle phase and the actual parameters of our vertical autoclave and along with set values are displayed on the LCD panel during the entire cycle progress.

The main parameters of the process such as, temperature, pressure, time are controlled and displayed, on the LCD panel of the system. The ergonomically designed keyboard located on the front level enables the user to choose the desired program, initiate and terminate the cycle, and allows a trained technician to preset the main parameters using an access code. Our PLC control system is extremely easy to use, user friendly and fully programmable.



For an elaborate and presentable documentation of cycle process, our logic control unit is provided with a diligent wipro/epson dot matrix printer, which is connected to the central microprocessor system. The printer generates a hard copy of the printout of the relevant or desired information relating to the cycle operation like the pressure, sterilization time, temperature at any given/pre set time interval, vacuum, and drying time, number of cycles, number of pulsing etc.

The standard vertical autoclave with PLC control system is designed to operate up to six standard sterilization programs between 105°C and 137°C and two test programs optional. The desired programs can be easily selected by using the numeric keypad, provided at the front level. Apart from that other parameters such as air removal, sterilization and drying stages can be programmed with utmost ease.

Universal Digital Data Recorder with Computer

Data Acquisition And Control System For Vertical Autoclave

This is a unique module which can be incorporated with our vertical autoclave to log in temperature and environment related data with a help of a data logger unit which has a pc connectivity by means of RS 232 C interface. This data is then analyzed and formatted with the help of our unique user friendly analysis software to enable the user to get a formatted and analyzed reports of various inputs during the full operation cycle of the equipment. This is an ideal module for pharmaceutical laboratories, process control applications and high research projects where maintaining a viable record of the performance of the equipment is very essential.


Feature

- Our system incorporates multiple Devices such as in line process Indicators, environment scanners and temperature or humidity controllers.
- Provides Astech cable for direct interface to any dot matrix or laser printer for online or offline data records printing
- It has Bulk data storage capacity with high data retention life.
- Facility to obtain nicely formatted print out of the logged data or records with proper headers.
- Our system provided facility to program recording interval with various options to suit individual requirements.
- It is provided with the feature to adjust or select baud rate for any serial communication port.
- Our system is provided with user friendly custom developed software which obtains and analyze the data and facilitates the user to generate reports and graphs etc.

We manufactures both

Standard And Customized

Autoclaves

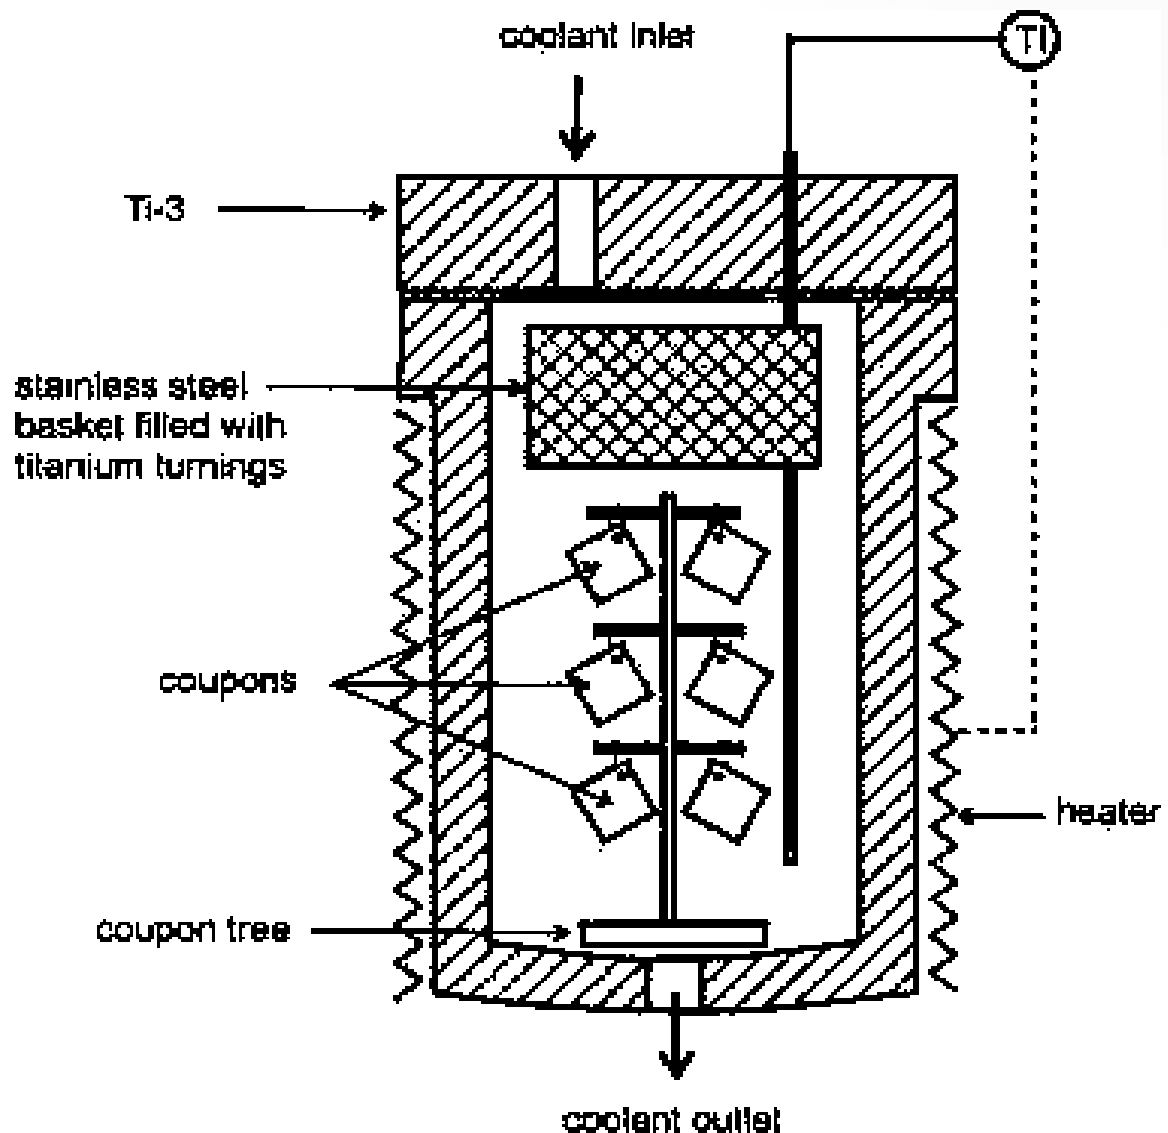



An ISO 9001 : 2208 | ISO 14001 : 2008 | ISO 13485

WHO: GMP Products | GLP Compliant Products

www.acmasindia.com | www.cleanroom-equipments.com | www.test-chambers.com

ACMAS TECHNOLOGIES PVT. LTD.

CORPORATE OFFICE/ SHOWROOM (INDIA)

Plot No. 352-353, Sector – 57
Phase- IV Kundli, Sonapat, HR 131028
Land Line No.: +91 - 11- 47619688,
Fax: +91-11-47619788
E-mail.: info@acmasindia.com

SALES OFFICE (HONG KONG)

Unit D 28 11/F Wing Tat Comm,Bidg 97, Bonham Strand East,
Sheung Wan, Hong Kong (PRC)
Tel.: 0086-13929598046 | 0086- 18922303099
E-mail.: hk@acmasindia.com

SALES OFFICE (RUSSIA)

Inmed Trade Street Ozerkovsky Embankment,
Unit No 50, Straine- 1, Off- 502, Moscow, Russia
E-mail.: info@acmasindia.com
Tel.: 0049- 79592345 | Email: russia@acmasindia.com